
Wellhead Oil Recovery

Medium and high-end wellhead equipment and manifolds

Intelligent choke valve

Reference standards: API 6A, ISO10423, GB/T22513 and NACE 0175

Rfc glrcjjgeclr afmic t_jtc a_l _srmk_rga_jjw pcesj_rc grq mnclgle bcepcc rm clqspc rfc qs`qcosclr npmbsargml _lb rfc pcosgpcb mu p_rcgl rfc e_qe_rfcpgle ngncjglc,

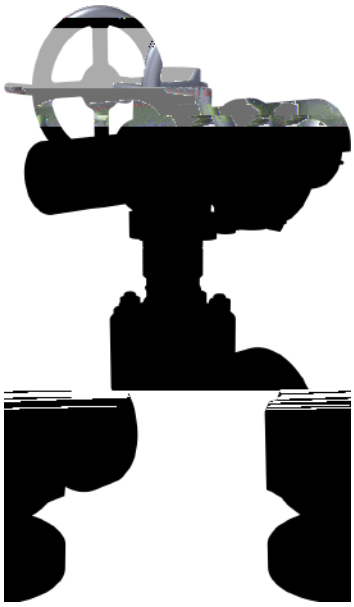

Product Features

- Fgefjw pcqgqr_lr rm pc8Gr f_q n_qqcb rfc ?NG 4D? rcqr,
- Pcjg_`jc pmb qc_jgle* u fgaf f_q n_qqcb rfc GQM /3626+0 rcqr,
- Fgefjw pcqgqr_lr rm qsjdsp FF* qspd_agle ugrf 403 mpglrcep_jjw ugrf 5/6 dmp n_prqgl amlr_ar ugrf sgb,
- ?aasp_rc mu amlrpmj, Djsclrqmdru_pcgq pqr sqcb rm qgk sj_rc mu asptc _aampbgle rm cjb mu af_p_arcpgqrgaq* ugrf rfc cjcarpga fc_b _bhsqrgle _aasp_aw amlrpmjjcb ugrfgl /#,
- C_qw rm mncp_rc, K_ls_j* fwbp_sjga* vcb _lb cjcarpga bpgtgle kmbcq_pc _t_gj_`jc,

Highly resistant to fire

N_qqcb rfc ?NG 4D? rcqr

Highly resistant to sulfur HH

Qspd_agle ugrf 403 mpglrcep_jjw ugrf 5/6 dmp n_prqgl amlr_ar ugrf sgb

Easy to operate

K_ls_j* fwbp_sjga* vcb _lb cjcarpga bpgtgle kmbcq_t_gj_`jc